




02 - 03.4
06.23.GB

DESUPERHEATER **CHP**



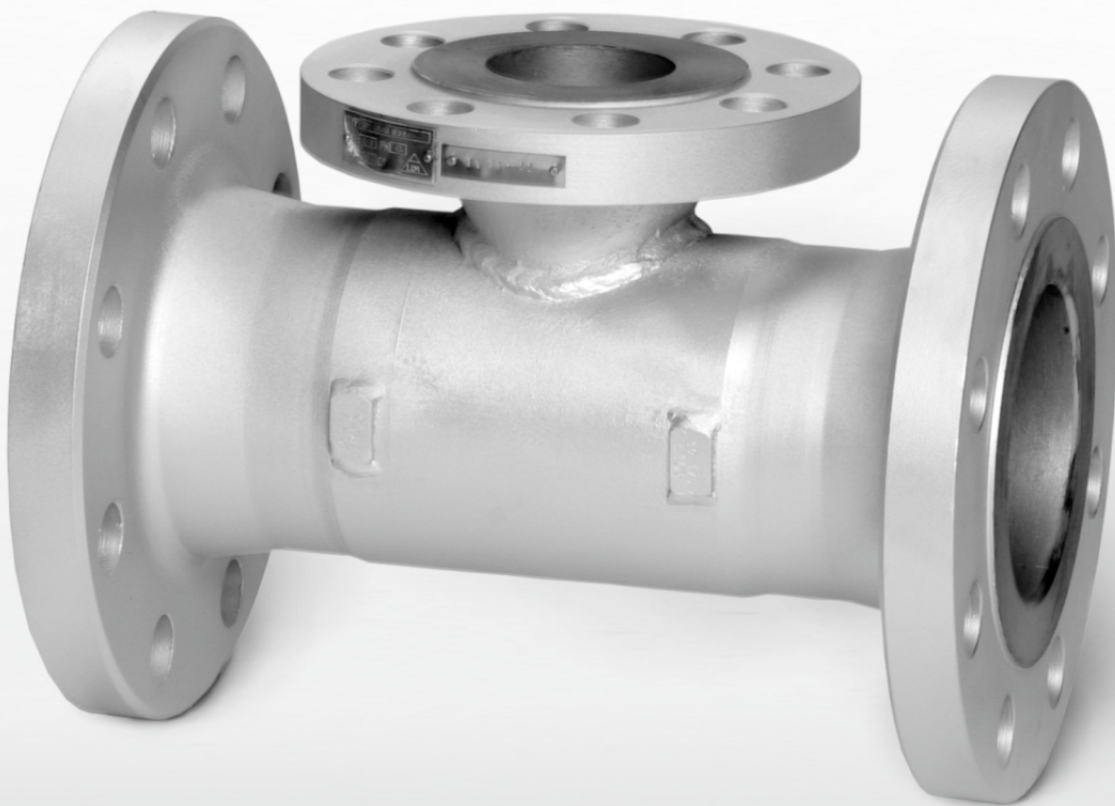

CHP

Desuperheater

DN 100 and higher
PN 16 to 400

Description

CHP is a body that is put directly into the steam pipeline and subsequently serves for connection with injection head VH, VHP or VHF (further VHx). According to dimensions of the pipeline and necessary intensity of cooling, the body can be equipped with more inlets for connection of VHx.

CHP is supplied with flanges or with weld ends with connection flange 2 for connection of VHx (max. temperature 350°C) or DN 80 (flange 1 DN 150 and higher) and dimensions according to customers requirements.

Application

CHP serves as an in-between link into the steam pipeline into which it is possible to install injection head VHx. It is designed especially for industrial applications such as low-pressure steam production in heating or the steam production for technological processes.

Process media

Application of CHP for other process media than water, water vapour, should be selected in respect to the kind of process medium that is in touch with the material of CHP and should be consulted with the producer.

Installation

It is necessary to keep free space above connection flange (flange 2) for possible installation of injection head VHx. CHP can be piped horizontally, vertically or inclined.


Technical data									
Series	CHP								
Execution	Flanged or weld ends								
Nominal diameter range	Flange 1: DN 100 and higher; flange 2: DN 50 and DN 80								
Nominal pressure PN	PN 16 to 400								
Body material (flanges / weld ends)	<table border="0"> <tr> <td>Cast steel 1.0425 (P265GH) / 1.0426 (P280GH)</td> <td>20 to 480 °C</td> </tr> <tr> <td>Alloy steel 1.7335 (13CrMo4-5)</td> <td>20 to 550 °C</td> </tr> <tr> <td>Alloy steel 1.7380 (10CrMo9-10) / 1.7383 (11CrMo9-10)</td> <td>20 to 600 °C</td> </tr> <tr> <td>Stainless steel 1.4922 (X20CrMoV11-1)</td> <td>20 to 600 °C</td> </tr> </table>	Cast steel 1.0425 (P265GH) / 1.0426 (P280GH)	20 to 480 °C	Alloy steel 1.7335 (13CrMo4-5)	20 to 550 °C	Alloy steel 1.7380 (10CrMo9-10) / 1.7383 (11CrMo9-10)	20 to 600 °C	Stainless steel 1.4922 (X20CrMoV11-1)	20 to 600 °C
Cast steel 1.0425 (P265GH) / 1.0426 (P280GH)	20 to 480 °C								
Alloy steel 1.7335 (13CrMo4-5)	20 to 550 °C								
Alloy steel 1.7380 (10CrMo9-10) / 1.7383 (11CrMo9-10)	20 to 600 °C								
Stainless steel 1.4922 (X20CrMoV11-1)	20 to 600 °C								
Connection dimensions (flange 1 / weld ends)	Acc. to ČSN EN 1092-1 (7/2019) / ČSN EN 12627 (8/2018) *)								
Connection flange 2 dimensions	Acc. to ČSN EN 1092-1 (7/2019)								

*) Dimensions and type of connection (flange / weld connection) acc. to customer requirements. It shall be specified in order.

Connection dimensions																
Flange 1			Flange 2												V	L
PN	DN	DN	PN 100, 160			PN 250			PN 320			PN 400				
			D ₁ mm	D ₂ mm	d mm	D ₁ mm	D ₂ mm	d mm	D ₁ mm	D ₂ mm	d mm	D ₁ mm	D ₂ mm	d mm	mm	mm
16 to 400	min. 100 **)	50	195	145	26	200	150	26	210	160	26	235	180	30	**)	**)
		80 *)	230	180	26	250	200	30	275	220	30	305	240	33		

*) Execution with connection flange 2 DN 80 only with flange 1 DN 150 and higher

***) Dimensions and type of connection (flange / weld connection) acc. to customer requirements. It shall be specified in order

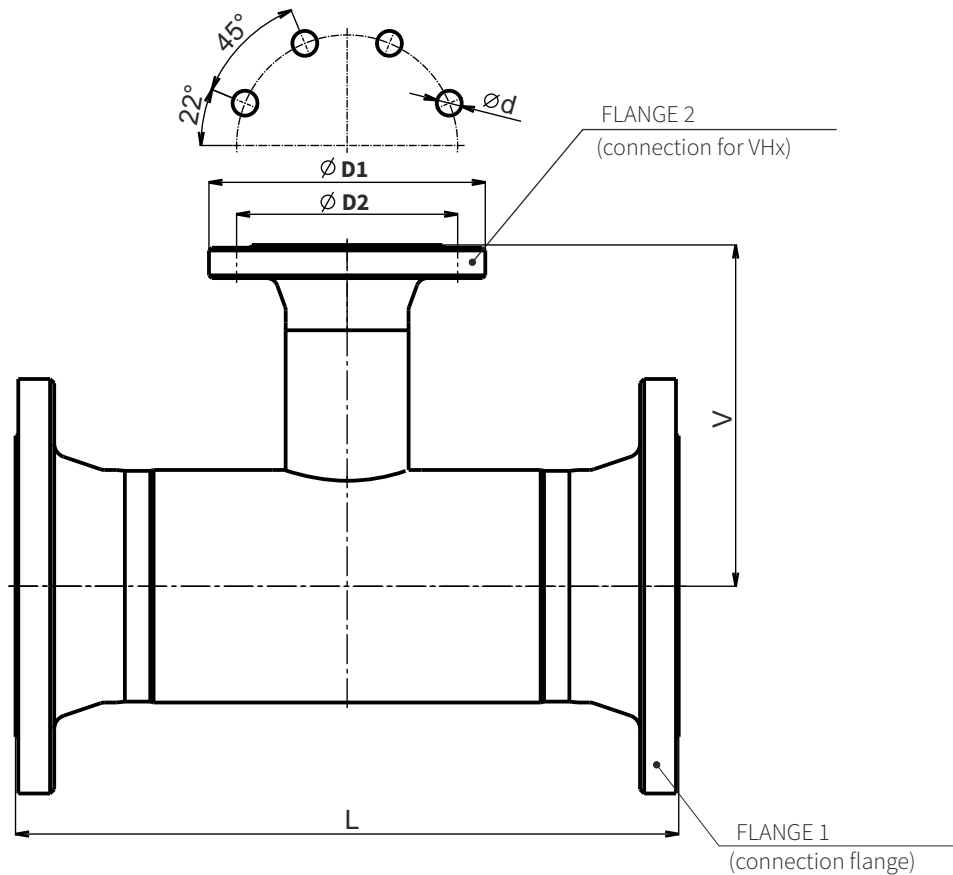

Valve complete specification No. for ordering CHP							
1. Series	Steam cooling unit	XXX	X	XXX	/	XXX - XXX	X
2. No. of inlets	Acc. to intensity of cooling	CHP	X				
3. Nominal diameter	Flange 1 - steam pipeline			XXX			
	Flange 2 - connection VHx	DN 50				050	
		DN 80 (flange 1 DN 150 and more)				080	
4. Nominal pressure	PN						XXX
5. Body material	Cast steel 1.0425 / 1.0426	(20 to 480°C)					1
	Alloy steel 1.7335	(20 to 550°C)					2
	Alloy steel 1.7380 / 1.7383	(20 to 600°C)					6
	Stainless steel 1.4922	(20 to 600°C)					7
	Other material						9

Order example: Steam cooling unit, steam pipeline flange DN 150, PN 40, connection flange DN 80, PN 100, body material 1.0425 is marked as follows: **CHP1150/080-0401**

Max. permissible operating pressures [MPa]													
Material	PN	Temperature [°C]											
		100	150	200	250	300	350	400	450	480	500	550	600
Cast steel 1.0425 / 1.0426	16	1.5	1.42	1.34	1.23	1.11	1.04	0.96	0.59	0.36	---	---	---
	25	2.34	2.22	2.10	1.92	1.74	1.62	1.50	0.92	0.56	---	---	---
	40	3.74	3.55	3.36	3.07	2.78	2.59	2.40	1.47	0.90	---	---	---
	63	5.90	5.59	5.29	4.84	4.38	4.08	3.78	2.32	1.41	---	---	---
	100	9.36	8.88	8.40	7.68	6.96	6.48	6.00	3.68	2.24	---	---	---
	160	14.9	14.2	13.4	12.2	11.1	10.3	9.60	5.89	3.59	---	---	---
	250	23.4	22.2	21.0	19.2	17.4	16.2	15.0	9.20	5.60	---	---	---
	320	29.9	28.4	26.8	24.5	22.2	20.7	19.2	11.7	7.17	---	---	---
	400	37.4	35.5	33.6	30.7	27.8	25.9	24.0	14.7	8.96	---	---	---
Alloy steel 1.7335	16	1.6	1.6	1.6	1.6	1.6	1.49	1.37	1.26		1.0	0.47	---
	25	2.5	2.5	2.5	2.5	2.5	2.33	2.13	1.97		1.56	0.73	---
	40	4.0	4.0	4.0	4.0	4.0	3.73	3.41	3.15		2.5	1.17	---
	63	6.3	6.3	6.3	6.3	6.3	5.87	5.38	4.97		3.93	1.85	---
	100	10.0	10.0	10.0	10.0	10.0	9.31	8.53	7.89		6.24	2.93	---
	160	16.0	16.0	16.0	16.0	16.0	14.9	13.6	12.6		9.99	4.70	---
	250	25.0	25.0	25.0	25.0	25.0	23.2	21.3	19.7		15.6	7.34	---
	320	32.0	32.0	32.0	32.0	32.0	29.8	27.3	25.2		19.9	9.39	---
	400	40.0	40.0	40.0	40.0	40.0	37.2	34.1	31.5		24.9	11.7	---
Alloy steel 1.7380 / 1.7383	16	1.6	1.6	1.6	1.6	1.6	1.5	1.37	1.26		1.05	0.56	0.24
	25	2.5	2.5	2.5	2.5	2.5	2.35	2.13	1.97		1.65	0.88	0.37
	40	4.0	4.0	4.0	4.0	4.0	3.75	3.41	3.15		2.63	1.41	0.6
	63	6.3	6.3	6.3	6.3	6.3	5.91	5.38	4.97		4.15	2.22	0.94
	100	10.0	10.0	10.0	10.0	10.0	9.38	8.53	7.89		6.58	3.52	1.49
	160	16.0	16.0	16.0	16.0	16.0	15.0	13.6	12.6		10.5	5.63	2.39
	250	25.0	25.0	25.0	25.0	25.0	23.4	21.3	19.7		16.4	8.80	3.73
	320	32.0	32.0	32.0	32.0	32.0	30.0	27.3	25.2		21.0	11.2	4.78
	400	40.0	40.0	40.0	40.0	40.0	37.5	34.1	31.5		26.3	14.0	5.98
Stainless steel 1.4922	16	1.6	1.6	1.6	1.6	1.6	1.5	1.37	1.26		1.05	0.9	0.42
	25	2.5	2.5	2.5	2.5	2.5	2.35	2.13	1.97		1.65	1.46	0.65
	40	4.0	4.0	4.0	4.0	4.0	3.75	3.41	3.15		2.63	2.33	1.05
	63	6.3	6.3	6.3	6.3	6.3	5.91	5.38	4.97		4.15	3.67	1.65
	100	10.0	10.0	10.0	10.0	10.0	9.38	8.53	7.89		6.58	5.82	2.61
	160	16.0	16.0	16.0	16.0	16.0	15.0	13.6	12.6		10.5	9.32	4.18
	250	25.0	25.0	25.0	25.0	25.0	23.4	21.3	19.7		16.4	14.5	6.54
	320	32.0	32.0	32.0	32.0	32.0	30.0	27.3	25.2		21.0	18.6	8.37
	400	40.0	40.0	40.0	40.0	40.0	37.5	34.1	31.5		26.3	23.3	10.4



LDM, spol. s r.o.
Litomyšlská 1378
560 02 Česká Třebová
Czech Republic

tel.: +420 465 502 511
fax: +420 465 533 101
e-mail: sale@ldm.cz

LDM, spol. s r.o.
Office Praha
Podolská 50
147 01 Praha 4
Czech Republic

tel.: +420 241 087 360
fax: +420 241 087 192
e-mail: sale@ldm.cz

LDM, spol. s r.o.
Office Ústí nad Labem
Ladova 2548/38
400 11 Ústí nad Labem
- Severní Terasa
Czech Republic

tel.: +420 602 708 257
e-mail: tomas.kriz@ldm.cz

LDM servis, spol. s r.o.
Litomyšlská 1378
560 02 Česká Třebová
Česká Republika

tel.: +420 465 502 411-3
fax: +420 465 531 010
e-mail: servis@ldm.cz

LDM Bratislava s.r.o.
Mierová 151
821 05 Bratislava
Slovakia

tel.: +421 2 43415027-8
fax: +421 2 43415029
e-mail: ldm@ldm.sk

LDM, Polska Sp. z o.o.
ul. Bednorza 1
40 384 Katowice
Poland

tel.: +48 32 730 56 33
fax: +48 32 730 52 33
mobile: +48 601 354 999
e-mail: ldmpolska@ldm.cz

LDM Armaturen GmbH
Wupperweg 21
D-51789 Lindlar
Germany

tel.: +49 2266 440333
fax: +49 2266 440372
mobile: +49 177 2960469
e-mail: ldmmaturen@ldmvalves.com

OOO "LDM Promarmatura"
Jubilejnyj prospekt,
dom.6a, of. 601
141400 Khimki Moscow Region
Russia

tel.: +7 4957772238
fax: +7 4956662212
mobile: +7 9032254333
e-mail: inforus@ldmvalves.com

TOO "LDM"
Shakirova 33/1
kab. 103
100012 Karaganda
Kazakhstan



tel.: +7 7212 566 936
fax: +7 7212 566 936
mobile: +7 701 738 36 79
e-mail: sale@ldm.kz

LDM - Bulgaria - OOD
z. k. Mladost 1
bl. 42, floor 12, app. 57
1784 Sofia
Bulgaria

tel.: +359 2 9746311
fax: +359 2 9746311
mobile: +359 888 925 766
e-mail: ldm.bg@ldmvalves.com

www.ldmvalves.com

LDM, reserves the right to modify or improve the designs or specifications of such products at any time without notice

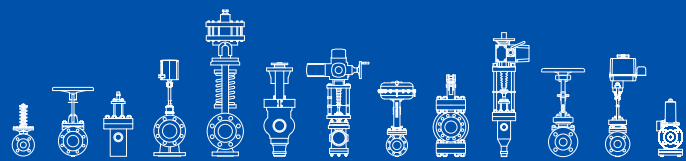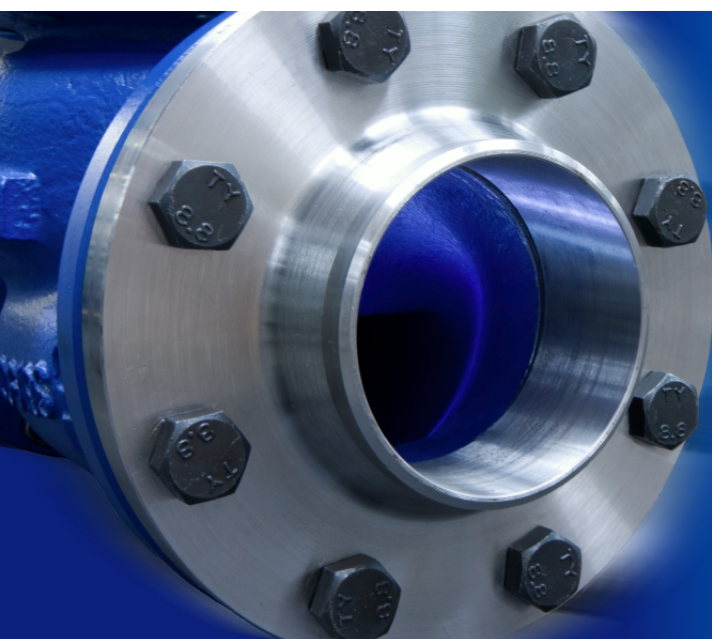

POWER THROUGH IDEAS